


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

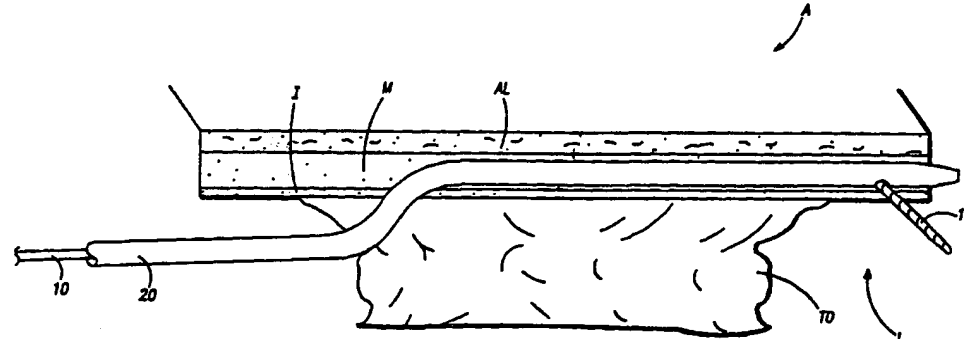

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : <b>A61B 17/22</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 99/35979</b> (43) International Publication Date: 22 July 1999 (22.07.99)</p>
<p>(21) International Application Number: PCT/US98/26938 (22) International Filing Date: 18 December 1998 (18.12.98) (30) Priority Data: 09/006,563 13 January 1998 (13.01.98) US (63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Application US 09/006,563 (CON) Filed on 13 January 1998 (13.01.98) (71) Applicant (for all designated States except US): LUMEND, INC. [US/US]; 400 Chesapeake Drive, Redwood City, CA 94063 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): SELMON, Matthew, R. [US/US]; 675 Mountain House Road, Woodside, CA 94062 (US). HILL, Richard, E. [US/US]; 2430 Oregon Street, Berkeley, CA 94062 (US). CO, Fred, H. [US/US]; 622 Bucher Avenue, Santa Clara, CA 95051 (US). MILO, Charles, F. [US/US]; 32407 Monterey Drive, Union City, CA 94587 (US). FRENCH, Ronald, G. [US/US]; 555 Bryant Street, Palo Alto, CA 94301 (US).</p>		<p>(74) Agent: ENG, U., P., Peter; Wilson Sonsini Goodrich &amp; Rosati, 650 Page Mill Road, Palo Alto, CA 94304-1050 (US). (81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  Published With international search report.</p>
<p>(54) Title: METHODS AND APPARATUS FOR CROSSING TOTAL OCCLUSIONS IN BLOOD VESSELS</p>		
 <p>The diagram shows a cross-section of a blood vessel with an occlusion. A guidewire (10) is inserted from the left, passing through the occlusion into the subintimal space. A catheter (20) is also inserted, following the guidewire. The vessel wall is labeled with 'I' (intimal layer) and 'AL' (adventitial layer). The occlusion is labeled '10'. The catheter is labeled '20'. The guidewire is labeled '10'. The vessel lumen is labeled 'L'. The catheter is shown with a deflected tip (10) passing through the occlusion.</p>		
<p>(57) Abstract</p> <p>Total occlusions are crossed by passing a guidewire or other penetrating wire from a point proximal to the occlusion into a subintimal space between the intimal layer and adventitial layer of the blood vessel wall. The wire is advanced to a point distal the occlusion and thereafter deflected back into the blood vessel lumen, typically using a deflecting catheter which is advanced over the guidewire after it has been positioned within the subintimal space. After the guidewire is returned to the blood vessel lumen, the deflecting catheter may be withdrawn and the guidewire is available for introduction of other interventional and diagnostic catheters.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

5                   **METHODS AND APPARATUS FOR CROSSING TOTAL  
                    OCCLUSIONS IN BLOOD VESSELS**

                    BACKGROUND OF THE INVENTION

1.    Field of the Invention

10                   The present invention relates generally to medical  
                    devices, kits, and methods. More particularly, the present  
                    invention relates to systems and procedures for crossing  
                    chronic total occlusions in blood vessels with guidewires and  
                    subsequently performing angioplasty, atherectomy, stenting, or  
15                   other treatments.

                    Cardiovascular disease is a leading cause of  
                    mortality worldwide. Cardiovascular disease can take many  
                    forms, and a variety of specific interventional and  
                    pharmaceutical treatments have been devised over the years  
20                   with varying levels of success.

                    A particularly troublesome form of cardiovascular  
                    disease results when a blood vessel becomes totally occluded  
                    with atheroma or plaque, referred to as a chronic total  
                    occlusion. Until recently, chronic total occlusions have  
25                   usually been treated by performing a bypass procedure where an  
                    autologous or synthetic blood vessel is anastomotically  
                    attached to locations on the blood vessel upstream and  
                    downstream of the occlusion. While highly effective, such  
                    bypass procedures are quite traumatic to the patient.

30                   Recently, catheter-based intravascular procedures  
                    have been utilized to treat chronic total occlusions with  
                    increasing success. Catheter-based intravascular procedures  
                    include angioplasty, atherectomy, stenting, and the like, and  
                    are often preferred because they are much less traumatic to  
35                   the patient. Before such catheter-based treatments can be  
                    performed, however, it is usually necessary to cross the  
                    occlusion with a guidewire to provide access for the  
                    interventional catheter. In some instances, crossing the  
                    occlusion with a guidewire can be accomplished simply by

pushing the guidewire through the occlusion. The guidewire remains in the blood vessel lumen and provides the desired access path. In many cases, however, the guidewire inadvertently penetrates into the subintimal space between the intimal layer and the adventitial layer of the blood vessel as it attempts to cross the occlusion. Once in the subintimal space, it is very difficult and in many cases impossible to direct the guidewire back into the blood vessel lumen. In such cases, it will usually be impossible to perform the catheter-based intervention and other, more traumatic, procedures may have to be employed.

For these reasons, it would be desirable to provide methods, kits, and apparatus which facilitate crossing a chronic total occlusion in a blood vessel with a guidewire. In particular, it would be desirable to provide catheters, guides, or other apparatus which could be used with a conventional or specialized guidewire to direct or redirect the guidewire from the subintimal space back into the blood vessel lumen after the guidewire has entered such space. Such methods and apparatus should be useful in coronary arteries as well as other blood vessels and should be capable of being performed with or without imaging from within or adjacent to the blood vessel. The apparatus for achieving these objective should be of simple construction and be capable of being used in a straight-forward, generally fool-proof manner. At least some of these objectives will be met by the invention described hereinafter.

## 2. Description of the Background Art

Catheters having side guidewire entry ports spaced proximally from their distal tips are described in U.S. Patent Nos. 5,464,395; 5,413,581; 5,190,528; 5,183,470; 4,947,864; and 4,405,314. Catheters and methods for forming lateral penetrations through tissue to and from blood vessels past total occlusions are described in U.S. Patent Nos. 5,443,497; 5,429,144; 5,409,019; 5,287,861; WO 97/13463; and WO 97/13471.

## SUMMARY OF THE INVENTION

According to the present invention, methods are provided for crossing total occlusions in blood vessels. While the methods are particularly beneficial for the treatment of coronary artery disease, they are also useful in the treatment of other arteries and veins, such as the treatment of peripheral vascular diseases.

The total occlusions are crossed by first forming a track from a lumen in the blood vessel into a subintimal space between an intimal layer and an adventitial layer of the blood vessel. The track is formed so that it extends from a location proximal of the total occlusion to a location which is distal to the total occlusion. A passage is then formed from the track back into the blood vessel lumen at the distal location. In the specific embodiments, the track is formed by advancing a wire through the blood vessel lumen into the subintimal space, typically by advancing the wire until it encounters the total occlusion. By continuing to advance the wire, it will usually pass into the subintimal space and can be further advanced to the desired distal location. After the wire is located distally to the total occlusion, it is typically deflected from the track back into the blood vessel lumen.

In the exemplary methods, the wire is deflected using a deflecting catheter. Typically, the deflecting catheter is advanced over a proximal end of the wire and advanced into the track within the subintimal space. The wire and the deflecting catheter are then manipulated so that the wire is deflected laterally through the intimal layer back into the blood vessel lumen. Such deflecting catheters are also useful in supporting the wire as it is advanced into and/or through the track, i.e. the catheter can enhance the "pushability" of the wire when it is advanced forward through any resisting material. Specific designs for such deflecting catheters are described in detail below. Alternatively, the wire which is initially positioned within the track in the subintimal space may be withdrawn through the deflecting catheter and exchanged for a second wire or other device

suitable for penetrating through the intimal layer back into the blood vessel lumen. It will be appreciated that the wires and/or deflecting and other catheters may be freely exchanged over or through one another in a conventional matter without departing from the present invention.

It will usually be necessary to determine when the wire and/or deflecting catheter are positioned distal to the total occlusion so that the wire may be returned to the blood vessel lumen beyond said occlusion. Most simply, such position determination can be made by fluoroscopically imaging the blood vessel in a conventional manner. Alternatively or additionally to such fluoroscopic imaging, intravascular imaging, e.g. intravascular ultrasonic imaging (IVUS), and a variety of optical imaging modalities, such as optical coherence tomography (OCT), may be employed. For example, an ultrasonic imaging guidewire may be used to initially access the subintimal space and/or may be exchanged for the wire which is used to access the subintimal space. An imaging guidewire present in the subintimal space may readily detect the presence or absence of occluding material within the blood vessel lumen. When the transition from occluding material to lack of occluding material is detected, it is known that the position of the guidewire has advanced beyond the total occlusion.

After the passage is formed back from the track into the blood vessel lumen and a wire is in place across the total occlusion, the wire is available for use as a guidewire in positioning interventional and diagnostic catheters across the total occlusion. Most commonly, interventional catheters will be positioned across the total occlusion for treating the occlusion. Exemplary interventional catheters include angioplasty balloon catheters, rotational atherectomy catheters, directional atherectomy catheters, stent-placement catheters, and the like.

In a preferred aspect of the methods of the present invention, the wire deflecting step will comprise deflecting a cannula from the subintimal space back into the blood vessel lumen and thereafter passing the wire through a path defined

by the cannula, typically by a lumen within the cannula. Usually, the cannula will be advanced over the wire after the wire is disposed within the subintimal space, and the cannula-deflecting step will comprise advancing a resilient (pre-  
5 formed) curved end of the cannula from a constraining lumen into the blood vessel lumen. Alternatively, the wire-deflecting step may comprise advancing a deflecting catheter over the wire which has been advanced into the subintimal space. A cannula may then be advanced through a lateral  
10 opening of the deflecting catheter and penetrated through the intimal layer to define a path for the wire back into the blood vessel lumen. Steerable and other actively deployed cannulas may also be used.

The present invention further provides kits  
15 comprising a wire-deflecting catheter having a lumen or mechanism capable of laterally deflecting a wire. The kit will further comprise instructions setting forth any of the methods described above. Optionally, the kit may further comprise the wire which is used for penetrating the subintimal  
20 space and/or back into the blood vessel lumen. The kit will usually still further comprise a package for containing both the wire deflecting catheter and the instructions, and optionally the additional wire(s). Suitable packages include pouches, trays, tubes, boxes, and the like. The instructions  
25 may be printed on a separate package insert or may be printed in part or in whole on the packaging itself. Usually, the components of the kit within the package will be sterilized by conventional procedures.

Apparatus according to the present invention  
30 comprise wire-deflection systems. Exemplary wire-deflection systems usually comprise the wire-deflecting catheter which includes a catheter body and a deflecting cannula. The catheter body will have a proximal end, a distal end, and at least one lumen extending through at least a distal portion  
35 thereof. The lumen will have a distal opening and a lateral opening. The cannula also has a proximal end, a distal end, and at least one lumen extending through a distal portion thereof. The distal portion of the cannula will have a pre-

formed, resilient curve. The cannula will be slidably disposed within the lumen of the catheter body to assume (a) a straightened configuration when the cannula is proximally retracted within the catheter body lumen and (b) a curved configuration when the cannula is extended laterally through the lateral opening of the catheter body. In this way, the cannula can be selectively deflected through the intimal layer of the blood vessel according to the preferred methods described above. The system may further comprise a wire configured to pass through the cannula lumen. The wire may be a conventional guidewire, but will more typically be a wire having a sharpened distal tip intended particularly for penetrating the intimal layer of the blood vessel wall. Optionally, the wire may further comprise an imaging means such as an ultrasonic imaging means. The catheter body will typically have a fluoroscopically visible marker near its distal end. The marker will be configured to permit visual determination of the rotational orientation of the distal end of the catheter body when viewed in a two-dimensional fluoroscopic image. The catheter body will usually be reinforced to enhance torsional rigidity, and may further comprise a distal nose cone wherein the distal and lateral openings are defined within the nose cone. The distal end of the cannula will usually be pre-formed in a smooth curve which may extend over an arc in the range from 15° to 135°, usually from 45° to 90°. The pre-formed curve may have a radius in the range from 0.5 mm to 15 mm, usually from 2 mm to 10 mm.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic illustration of a coronary artery showing the intimal layer, the medial layer, and the adventitial layer.

Fig. 2 is a schematic illustrations of a total occlusion within the coronary artery of Fig. 1, shown in full section.

Figs. 3A-3D illustrate the method of the present invention for crossing a total occlusion with a wire using a deflecting catheter.



Figs. 3BB illustrates an alternate guidewire advancement step for the method of Figs. 3A-3D.

Fig. 4 illustrates a first embodiment of the distal end of a deflecting catheter suitable for use in the methods of the present invention.

Fig. 5 illustrates a second embodiment of the distal end of a deflecting catheter useful in the methods of the present invention.

Fig. 6 illustrates a third embodiment of the distal end of a deflecting catheter useful in the methods of the present invention.

Fig. 7 illustrates a presently preferred embodiment for the wire-deflecting catheter and system of the present invention.

Figs. 8 and 9 are detailed, cross-sectional views of the distal end of the catheter of Fig. 7, illustrating an internal cannula in a retracted and advanced configuration, respectively.

Fig. 10 is a schematic illustration of a proximal hub of the catheter of Fig. 7.

Figs. 11A and 11B illustrate a configuration for rotationally keying the proximal end of the catheter of Figs. 7-10.

Fig. 12 illustrates a configuration for rotationally keying the distal end of the catheter of Figs. 7-10.

#### DESCRIPTION OF THE SPECIFIC EMBODIMENTS

Referring to Fig. 1, a normal (non-diseased) artery A comprises an arterial wall having a number of layers. The innermost layer is referred to herein as the intimal layer I which includes the endothelium, the subendothelial layer, and the internal elastic lamina. A medial layer M is concentrically outward from the intimal layer, and an adventitial layer AL is the outermost layer. Beyond the adventitial layer AL lies the extravascular tissue. As used hereinafter, the region between the intimal layer I and the adventitial layer AL, generally including the medial layer M, will be referred to as the subintimal space. It is the

subintimal space through which the wires, deflecting catheters, and other catheter of the present invention will pass when crossing a total occlusion.

Referring now to Fig. 2, a total occlusion TO within the artery A is illustrated. Total occlusion TO may comprise atheroma, plaque, thrombus, and/or other occluding materials normally associated with cardiovascular disease. By "total" occlusion, it is meant that the occluding material occludes substantially the entire lumen L of the artery or other blood vessel so that blood flow through the vessel is substantially stopped. The present invention will usually be used with patients where the totally occluded artery is not immediately life threatening since the tissue distal to the occlusion will receive oxygenated blood from collateral arteries. Usually, however, the blood supply will be insufficient and it will be desirable to treat the occlusion by an intravascular intervention, such as angioplasty, atherectomy, stenting, or the like, to restore blood flow through the affected vessel.

The method of the present invention will be described with reference to Figs. 3A-3D. These figures represent an upper portion of the artery of Fig. 2. As seen in Fig. 3A, a wire 10 is advanced through the lumen of the artery until it encounters the total occlusion TO. At that time, it is possible that the wire 10 will advance through the occlusion without deflecting into the blood vessel wall. Should that occur, subsequent repositioning of the guidewire according to the methods of the present invention may not be necessary. More usually, however, the wire 10 will advance into the subintimal space within the medial layer M, as shown in Fig. 3A. The intimal layer I and adventitial layer AL together define a "tissue plane" through which the wire will naturally pass as the wire is pushed distally from its proximal end. The wire 10 will continue to advance until its tip passes beyond the distal end of the total occlusion TO, as shown in Fig. 3B. The tip could axially advance well beyond the total occlusion until advancement is ceased.

Fig. 3B shows the guidewire 10 advancing without support. In some instances, however, the guidewire 10 may

encounter significant resistance as it enters and/or passes through the space between the intimal layer I and adventitial layer AL. If resistance is encountered, the deflection, catheter 20 may be used to support and enhance the

5 "pushability" of the guidewire 10 by advancing the catheter to a location just proximal of the distal tip of the guidewire, as shown in Fig. 3B. The guidewire 10 and catheter 20 may then be advanced sequentially, e.g. advancing the guidewire a short distance followed by advancing the catheter, and so on.

10 According to the present invention, however, once the wire 10 has its distal tip positioned beyond the total occlusion TO, deflecting catheter 20 may be advanced over the wire 10, by coaxial introduction over the proximal end of the wire, until it approaches the total occlusion, also as shown  
15 in Fig. 3B. The deflecting catheter 20 is then further advanced over the wire 10 until its distal tip also extends beyond the total occlusion TO, as illustrated in Fig. 3C. The deflecting catheter 20 will include some mechanism for laterally deflecting the wire 10 so that it may pass back in a  
20 radially inward direction through the intimal layer I back into the blood vessel lumen L. The deflection mechanism may take a variety of forms as described below. As shown in Fig. 3C, a lateral port 22 is provided. The wire 10 may be retracted so that its distal tip lies proximally of the port  
25 22 and then advanced distally so that the wire passes laterally outwardly through the port and back into the blood vessel lumen, as shown in Fig. 3D.

In order to optimize performance of this method, it is usually desirable to assure that the distal tip of the wire  
30 10 and the deflecting port 22 (or other deflecting mechanism) of the deflecting catheter 20 are properly positioned beyond the total occlusion TO without being advanced excessively beyond the end of the total occlusion. Typically, it will be desirable to position the deflecting mechanism at from 0 cm to  
35 2 cm beyond the distal end of the total occlusion TO, preferably from 0 cm to 0.5 cm. As discussed above, such positioning can in some instances be performed using conventional fluoroscopic imaging. For example, in some

instances it may be sufficient to provide suitable radiopaque markers on the wire and on the deflecting mechanism of the deflecting catheter 20 permitting visual positioning of the tip via fluoroscopy. Often, however, it will be desirable to provide ultrasonic or other imaging at or near the total occlusion. In one approach, wire 10 may be provided with ultrasonic imaging so that the presence and absence of the occluding material may be detected as the wire is advanced passed the total occlusion TO. Alternatively, the deflecting catheter 20 may be provided with such ultrasonic imaging, e.g. in the form of a phased array located near the distal tip (not shown). Ultrasonic imaging guidewires are described in the patent literature. See, e.g. U.S. 5,095,911, the full disclosure of which is incorporated herein by reference. As yet another alternative, an imaging guidewire may be advanced to the region of the total occlusion TO in a direction opposite to that of the wire 10 and catheter 20. In this way, the imaging guidewire need not advance through the total occlusion, but could still detect advancement of the catheter and/or guidewire, particularly if ultrasonically opaque components were provided on either or both of the catheter and wire. In yet another alternative, an ultrasonic imaging catheter or guidewire could be positioned in a vein adjacent to the arterial occlusion site, allowing imaging of the entire occluded region while the guidewire is advanced there through. Other imaging modalities, such as optical coherence tomography (OCT) (see U.S. Patent Nos. 5,321,501; 5,459,570; 5,383,467; and 5,439,000) fluorescence imaging (see U.S. Patent Nos. 4,718,417; and 5,106,387) and Raman spectroscopy (WO 92/18008), may also be employed.

A second desirable feature of the method of the present invention will be rotational positioning of the deflecting catheter 20. It will be appreciated that the direction of deflection is usually selective, and therefore it will be desirable to aim the deflecting mechanism from the subintimal space back toward the arterial or other blood vessel lumen L. If the catheter 22 is provided with ultrasonic imaging, such imaging can be used for rotationally

positioning the distal tip of the catheter. The catheter will be rotationally rigid so that rotation of its proximal end may position the distal end. By then detecting the presence of the blood vessel lumen, the deflecting port 22 or other  
5 deflecting mechanism can be properly positioned. In an alternative embodiment, as illustrated below in connection with the exemplary catheter, a rotationally specific fluoroscopic marker may be provided on the catheter 20. The marker will be such that by observing the two-dimensional  
10 image of the marker by fluoroscopic imaging, the rotational direction of the catheter tip can be determined.

Referring now to Figs. 4-6, exemplary deflecting mechanisms for the deflecting catheters of the present invention will be described. In Fig. 4, the distal end of the  
15 catheter 30 has a distal port 32, a lateral port 34, and a passive deflecting mechanism 36. The catheter 30 may be advanced over the proximal end of a wire so that the wire passes over the deflecting mechanism 36 and back into the main lumen of the catheter 30. The catheter 30 may then be  
20 advanced over the wire until the distal tip enters the subintimal space and approaches the distal end of the wire. By retracting the distal end of the wire within the lumen of catheter 30 so that its distal tip is proximal to the deflecting mechanism 36, subsequent distal advancement of the  
25 wire will engage the proximal surface of the deflecting mechanism and cause the wire to be deflected laterally through lateral port 34.

A first active deflecting mechanism is illustrated in Fig. 5. There, catheter 40 has a distal port 42 and a  
30 lateral port 44. Rather than a passive deflecting mechanism, catheter 40 includes an axially translatable cannula 46 having a resilient, pre-formed distal tip which may be advanced through port 44, as shown in broken line. The cannula 46 has a lumen which provides a guide path for the wire.

35 Catheter 50 illustrated in Fig. 6 is similar to catheter 40 in Fig. 5, except that no lateral port is provided. Instead, a cannula 52 having a pre-formed distal end may be advanced and retracted out of a distal port 54 of

the catheter 50 so that its distal end can assume a laterally deflected shape, as shown in broken line. It will be appreciated that these three embodiments are intended to be exemplary only. A wide variety of other passive and active  
5 deflecting mechanisms could be provided on deflecting catheters for use in the methods of the present invention.

Referring now to Figs. 7-10, a presently preferred exemplary deflecting catheter 100 constructed in accordance with the principles of the present invention will be  
10 described. The deflecting catheter 100 comprises a catheter body 102 having a distal end 104 and a proximal end 106. Catheter body 102 includes a single lumen 108 (Figs. 8 and 9), and a deflecting housing 110 secured to the distal end 104 thereof. An actuator hub 112 is secured to the proximal end  
15 106 of catheter body 102, and an axially translatable cannula is disposed within lumen 108. The cannula 114 has a sharpened tip 116, typically formed from a metal, hard plastic, composite, or the like, optically being radiopaque. Alternatively or additionally, it may be desirable to provide  
20 at least one separate radiopaque marker or the cannula at or near its distal end to facilitate visualization under fluoroscopic imaging. A distal length 118 of the cannula 114 is pre-formed in a curved shaped, as best seen in Figs. 7 and 9. A rotationally specific radiopaque marker 120 is mounted  
25 near the distal end of catheter body 102. As illustrated, the marker has a generally U-shaped configuration so that the rotational position of the distal end of the catheter body 102 will be apparent when the marker is observed in a two-dimensional fluoroscopic image.

30 As with catheter 40 in Fig. 5, the purpose of catheter 100 is to laterally deflect the distal tip of the cannula 114 through a lateral opening 122 in the deflector housing 110. The deflector housing 110 also includes a distal port 124 to permit introduction of the catheter 100 over the  
35 proximal end of a guidewire GW, as illustrated in Fig. 8 in broken line. The guidewire GW will pass through the distal port 124 and into the distal end of the cannula 114 and travel through a lumen of cannula 114 all the way to the proximal end

of the catheter 100. The distal length 118 of cannula 114 will be straightened and deflected by axially retracting and advancing the cannula between the configuration shown in Fig. 8 and Fig. 9, respectively.

5 Referring now to Fig. 10, the actuator hub 112 comprises a pair of coaxial, telescoping tubes 130 and 132. The outer telescoping tube 132 is connected to a proximal end of cannula 114, typically by an adhesive 134. A proximal fitting 136 is further attached to the proximal end of tube  
10 132 so that the assembly of the cannula 114, tube 132, and fitting 136 will move together as a unit through the hemostatic fitting 140 at the proximal end of the hub 112. Hub 112 further includes a rotational fitting 142 which permits the catheter body 102 to be rotated relative to the  
15 hub body. The cannula 114 and catheter body 102 will be rotationally coupled or "keyed" together to limit or prevent relative rotation, typically by keying within the hub and/or near the distal end, so that rotation of the catheter body causes a like rotation of the cannula as the catheter is  
20 rotationally positioned within a blood vessel. A side branch 148 is provided on hub 112 to permit perfusion and/or infusion through the lumen 108 of catheter 102.

Keying at the proximal end of the catheter 100 can be achieved in a variety of ways. For example, the  
25 telescoping tubes 130 and 132 can be provided with asymmetric, mating peripheral geometries, such as oval cross-sections (Fig. 11A) or triangular cross-sections (Fig. 11B). Keying at the distal end can also be achieved in a number of ways, such as providing the catheter body 102 with an asymmetric lumen  
30 108 and the cannula 114 with a mating cross-section, e.g. a D-shaped cross-section as illustrated in Fig. 12. The ability to limit relative rotation of the cannula 114 within the catheter body 102 is advantageous since it assures that curved distal length 118 is properly oriented (usually directed  
35 radially outwardly) when the tip 116 emerges through the opening 122.

In use, catheter 100 will be advanced over guidewire GW while the cannula 114 is retracted, as shown in Fig. 8.

Once the catheter is properly positioned, cannula 114 may be distally advanced, as shown in Fig. 9. Distal advancement is achieved by forwardly advancing the sleeve 132 in hub 136 relative to the remainder of the hub 112 so that the cannulas  
5 move forwardly within the lumen 108 of catheter body 102. Prior to advancing the cannula, the port 122 will be properly positioned so that it is directed toward the blood vessel lumen by rotating catheter body 102, typically using the rotational hub 142. Conveniently, the physician will observe  
10 the marker 120 so that the lateral port 122 will be directed in the proper radially inward direction. After the cannula has been advanced into the blood vessel, the guidewire GW may then be advanced into the lumen, the cannula 114 withdrawn proximally, and the entire catheter assembly then withdrawn  
15 from over the guidewire, leaving the guidewire in place for introduction of other interventional and/or diagnostic catheters.

While the above is a complete description of the preferred embodiments of the invention, various alternatives,  
20 modifications, and equivalents may be used. Therefore, the above description should not be taken as limiting the scope of the invention which is defined by the appended claims.



WHAT IS CLAIMED IS:

- 1           1.    A method for crossing a total occlusion in a  
2 blood vessel, said method comprising:  
3               forming a track from a lumen in the blood vessel  
4 into a space between an intimal layer and an adventitial layer  
5 of the blood vessel, said track extending from proximal of the  
6 total occlusion to past the total occlusion; and  
7               selectively forming a passage from the track back  
8 into the blood vessel lumen at a location distal to the total  
9 occlusion.
- 1           2.    A method for crossing a total occlusion, said  
2 method comprising:  
3               forming a track from a lumen in the blood vessel  
4 into a space between an intimal layer and an adventitial layer  
5 of the blood vessel, said track extending from proximal of the  
6 total occlusion to past the total occlusion, and  
7               deflecting a wire from the track back into the blood  
8 vessel at a location distal to the total occlusion.
- 1           3.    A method for crossing a total occlusion in a  
2 blood vessel, said method comprising:  
3               advancing a wire through a lumen of the blood vessel  
4 into a space between an intimal layer and an adventitial layer  
5 of the blood vessel to create a track in said space past the  
6 total occlusion; and  
7               selectively forming a passage from the track back  
8 into the blood vessel lumen at a location distal to the total  
9 occlusion.
- 1           4.    A method for crossing a total occlusion in a  
2 blood vessel, said method comprising:  
3               advancing a wire through a lumen of the blood vessel  
4 into a space between an intimal layer and an adventitial layer  
5 of the blood vessel; and

6           deflecting a wire from the subintimal space back  
7 into the blood vessel lumen a location distal to the total  
8 occlusion.

1           5. A method as in any of claims 1 to 4, wherein  
2 the blood vessel is an artery.

1           6. A method as in claim 5, wherein the artery is a  
2 coronary artery.

1           7. A method as in any of claims 1 to 4, further  
2 comprising performing an interventional or diagnostic  
3 procedure over a wire disposed in the subintimal space.

1           8. A method as in either claim 2 or claim 4,  
2 further comprising advancing an interventional or diagnostic  
3 catheter over the deflected wire from proximal to the  
4 occlusion, through the subintimal space, back into the blood  
5 vessel lumen.

1           9. A method as in any of claims 1 to 4, further  
2 comprising imaging the occlusion and blood vessel lumen to  
3 identify the location distal to the total occlusion.

1           10. A method as in claim 9, wherein the imaging  
2 step comprising imaging from within the subintimal space or  
3 blood vessel.

1           11. A method as in claim 9, wherein the imaging  
2 step comprises imaging from a position external to the  
3 subintimal space and the blood vessel.

1           12. A method as in claim 9, wherein the blood  
2 vessel is a coronary artery and the imaging step comprises  
3 imaging from a position in a vein adjacent to the coronary  
4 artery.

5           13. A method as in claim 4, wherein a single wire  
6 is both advanced into the subintimal space and deflected back  
7 into the blood vessel lumen.

1           14. A method as in claim 4, further comprising  
2 exchanging a first wire which is advanced into the subintimal  
3 space for a second wire which is deflected back into the blood  
4 vessel lumen.

1           15. A method as in claim 4, wherein the wire  
2 deflecting step comprises:  
3           deflecting a cannula from the subintimal space into  
4 the blood vessel lumen; and  
5           passing the wire through a path defined by the  
6 cannula.

1           16. A method as in claim 15, wherein the wire  
2 deflecting step further comprises advancing the cannula over  
3 the wire after said wire is disposed within the subintimal  
4 space and before the cannula is deflected.

1           17. A method as in claim 16, wherein the cannula-  
2 deflecting step comprises advancing a resilient curved end of  
3 the cannula from a constraining lumen into the blood vessel  
4 lumen.

1           18. A method as in claim 4, wherein the wire  
2 deflecting step comprises advancing a deflecting catheter over  
3 the wire which has been advanced into the subintimal space.

1           19. A method as in claim 18, further comprising  
2 passing a cannula thorough a lateral opening of the deflecting  
3 catheter and penetrating the cannula through the intimal  
4 layer, wherein the wire is thereafter advanced through a lumen  
5 of the cannula.

1           20. A method as in claim 19, wherein the wire  
2 deflecting step comprises:

3 retracting the wire into the cannula lumen before  
4 the cannula is passed through the lateral opening of the  
5 catheter; and

6 advancing the wire through the cannula after said  
7 cannula has been passed through the lateral opening of the  
8 catheter.

1 21. A method as in claim 19, wherein the deflecting  
2 step comprises:

3 withdrawing the wire from the cannula; and  
4 introducing a second catheter into the cannula and  
5 through said cannula after said cannula has been passed  
6 through the lateral opening of the catheter.

1 22. A method as in either claim 20 or claim 21,  
2 wherein the catheter and cannula are withdrawn from over the  
3 wire after said wire has deflected into the blood vessel  
4 lumen.

1 23. An improved method for advancing a guidewire  
2 thorough a subintimal space between an intimal layer and an  
3 adventitial layer and past a total occlusion in a blood  
4 vessel, wherein the improvement comprises selectively  
5 deploying the guidewire through a passage from the subintimal  
6 space back into the blood vessel lumen.

1 24. A kit comprising:  
2 a wire;  
3 a wire deflector having a lumen which deflects a  
4 wire laterally; and  
5 instructions setting forth use of the wire deflector  
6 according to any of claims 1 to 4.

1 25. A kit as in claim 24, wherein the wire, the  
2 wire deflector, and the instructions are packaged together in  
3 a single container.

1                   26. A kit as in claim 24, further comprising a  
2 wire.

1                   27. A wire deflection system comprising:  
2                   a catheter body having a proximal end, a distal end,  
3 and at least one lumen extending through at least a distal  
4 portion thereof, wherein said lumen has a distal opening and a  
5 lateral opening; and  
6                   a cannula having a proximal end, a distal end, and  
7 at least one lumen extending through a distal portion thereof,  
8 wherein said distal portion has a pre-formed resilient curve  
9 and wherein said distal portion of the cannula is slidably  
10 disposed in the lumen of the catheter body to assume (a) a  
11 straightened configuration with said cannula lumen axially  
12 aligned within the distal opening of the catheter body when  
13 the cannula is proximally retracted within the catheter body  
14 and (b) a curved configuration with the cannula extending  
15 laterally through the lateral opening of the catheter body  
16 when the cannula is distally advanced within the catheter  
17 body.

1                   28. A system as in claim 27, further comprising a  
2 wire configured to pass through the cannula lumen.

1                   29. A system as in claim 27, wherein the wire has a  
2 sharpened distal tip.

1                   30. A system as in claim 27, wherein the wire  
2 comprises means for imaging tissue surrounding the wire.

1                   31. A system as in claim 27, wherein the cannula  
2 comprises a self-penetrating distal end.

1                   32. A system as in claim 31, wherein the self-  
2 penetrating distal end comprises a sharpened distal tip.

                  33. A system as in claim 27, wherein the cannula  
comprises a radiopaque marker near its distal end.

1           34. A system as in claim 27, wherein the catheter  
2 body has a fluoroscopically visible marker near its distal end  
3 wherein said marker permits visual determination of the  
4 rotational orientation of the distal end of the catheter body.

1           35. A system as in claim 27, wherein the catheter  
2 body is reinforced to enhance its torsional rigidity.

1           36. A system as in claim 27, further comprising a  
2 distal nose cone attached to the distal end of the catheter  
3 body, wherein said nose cone defines the distal and lateral  
4 openings.

1           37. A system as in claim 27, wherein the pre-formed  
2 curve in the distal end of the cannula extends over an arc in  
3 the range from 15° to 135°.

1           38. A system as in either claim 27 or 37, wherein  
2 the pre-formed curve has a radius in the range from 1 mm to 20  
3 mm.

1           39. A system as in claim 27, further comprising a  
2 hub rotationally secured to a proximal end of the catheter  
3 body.

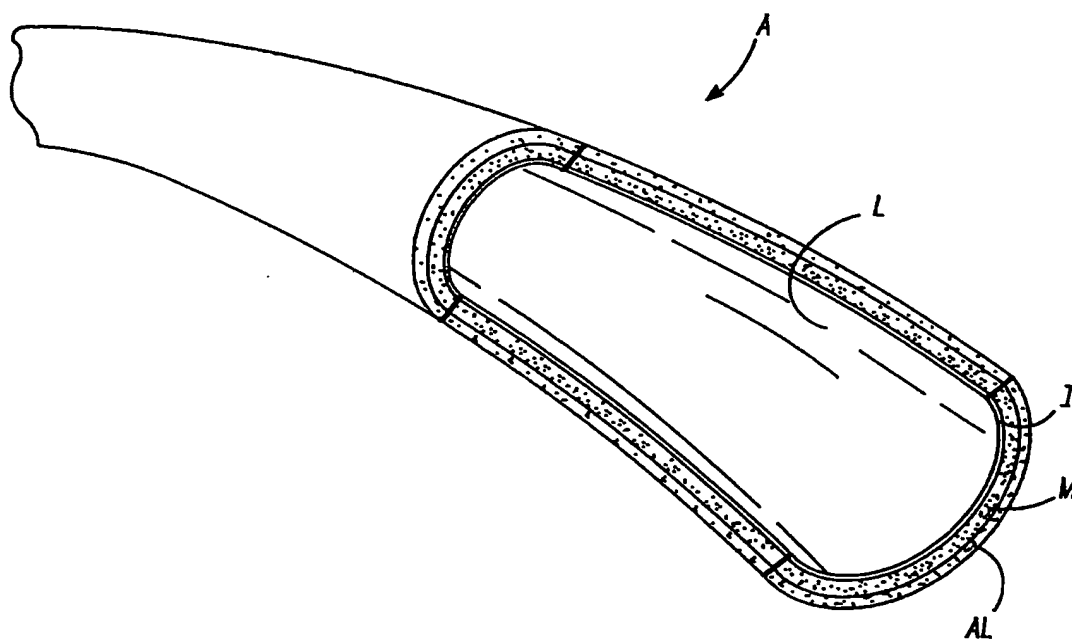


FIG. -1

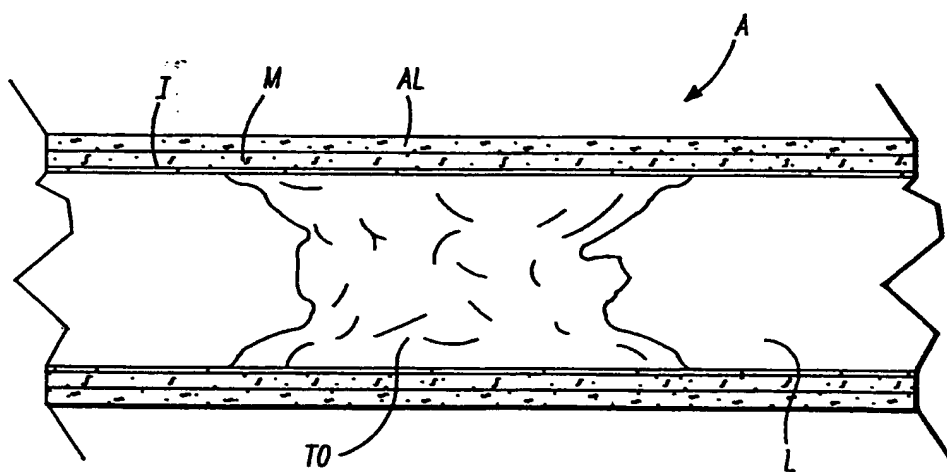


FIG. -2

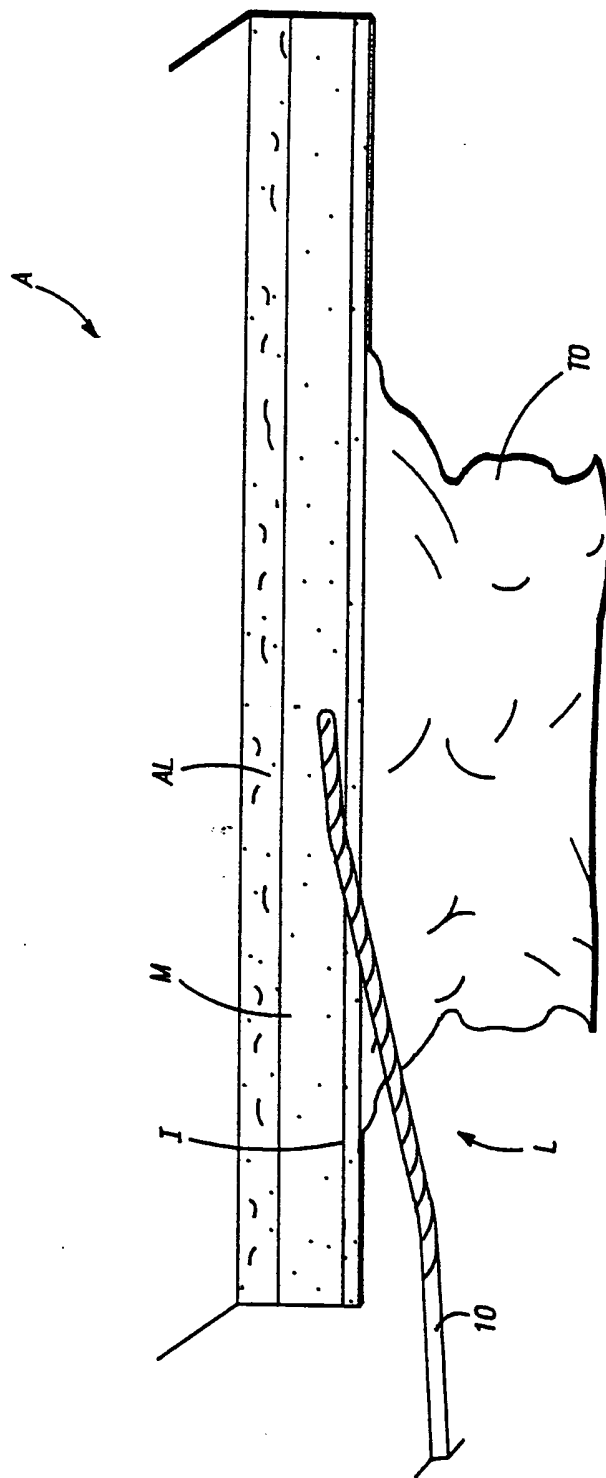


FIG. -3A



3/11

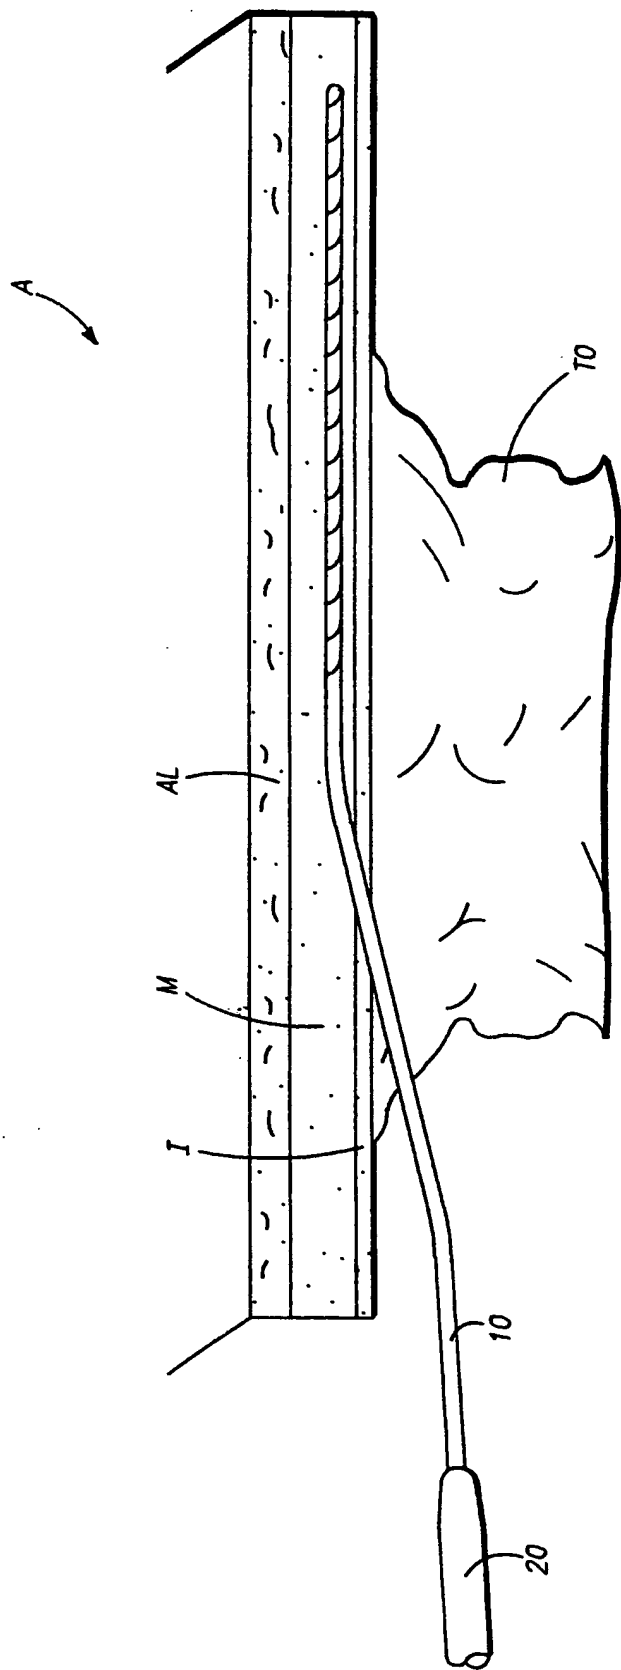


FIG. -3B

4/11

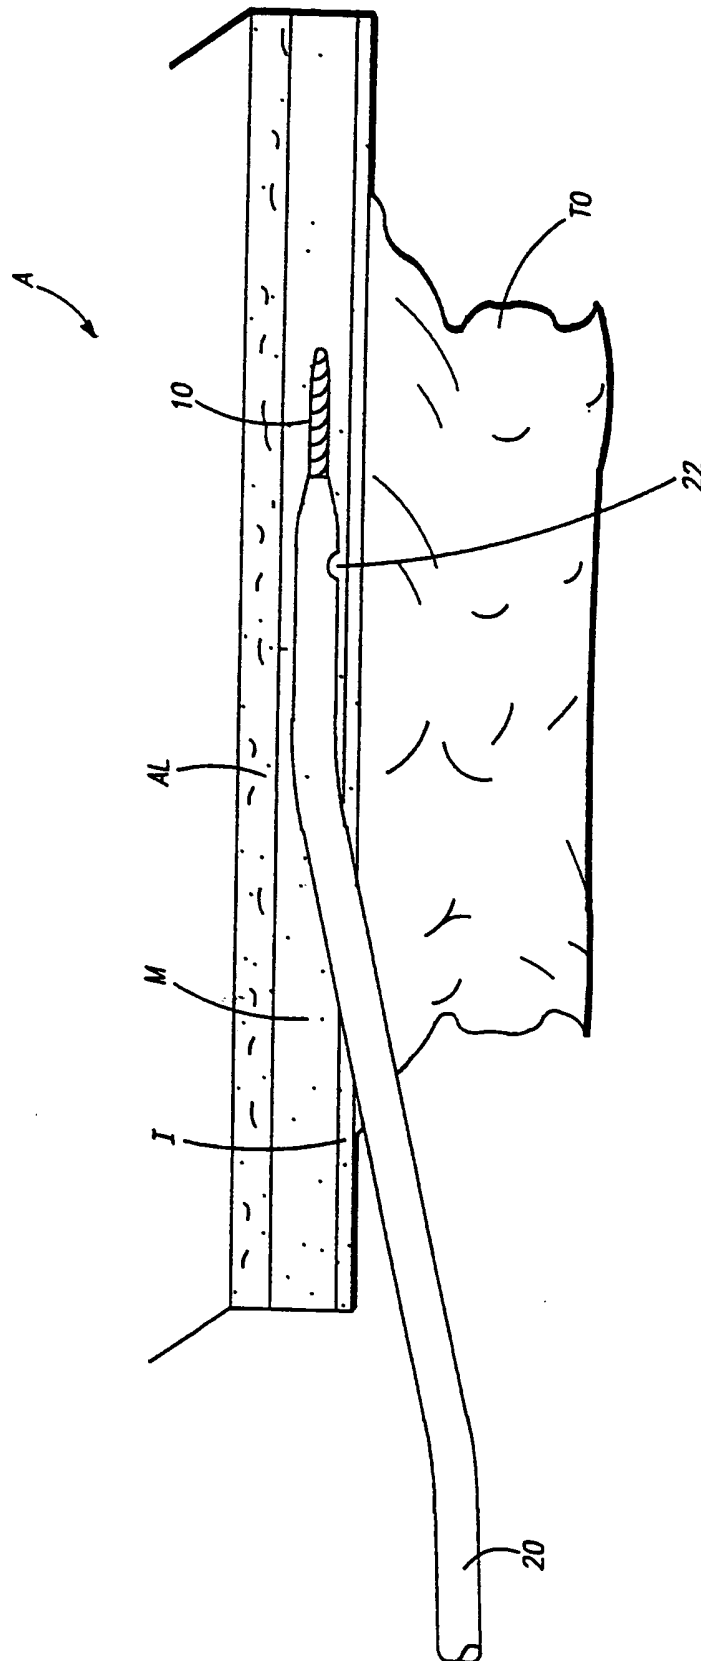


FIG. -3BB

5/11

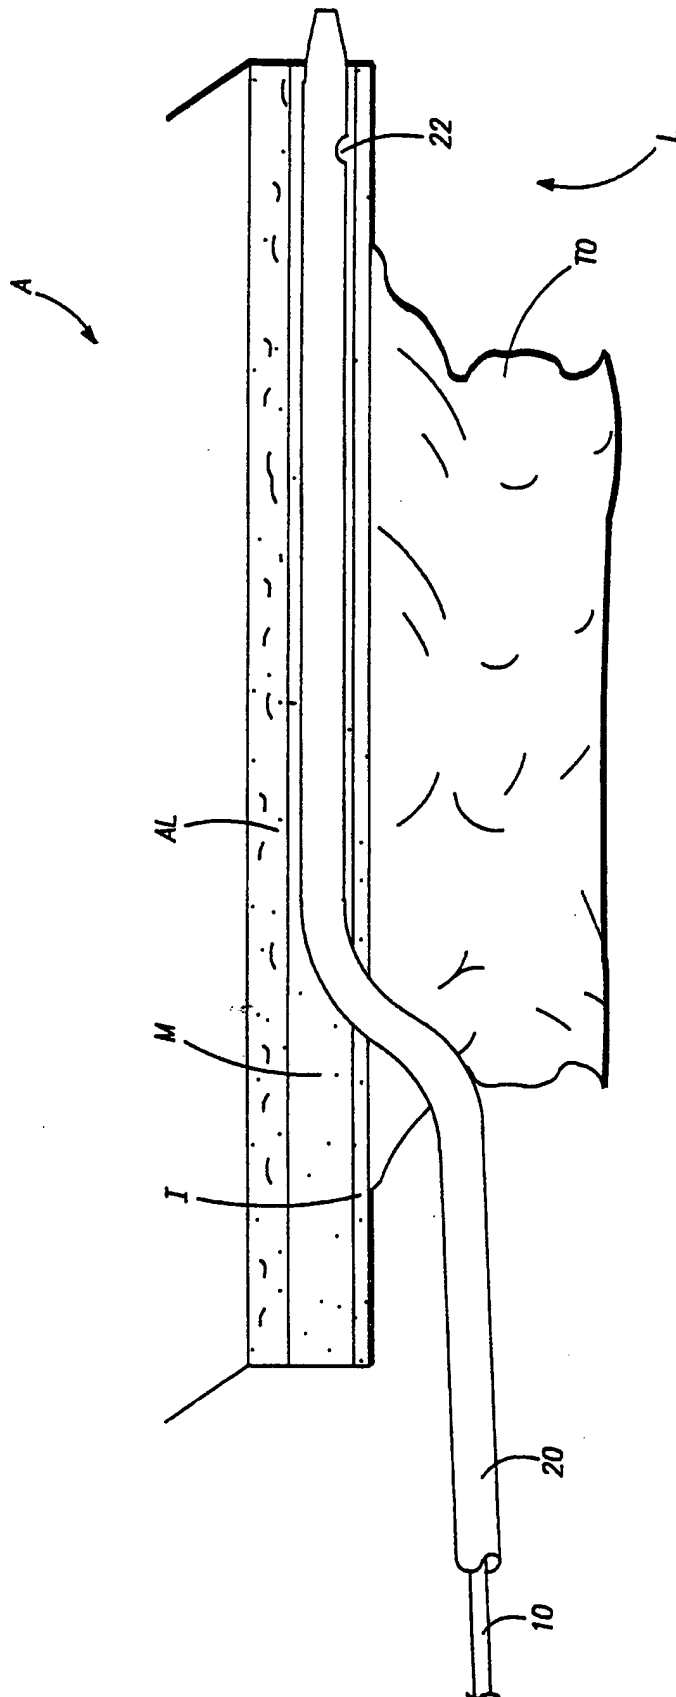


FIG. -3C

6/11

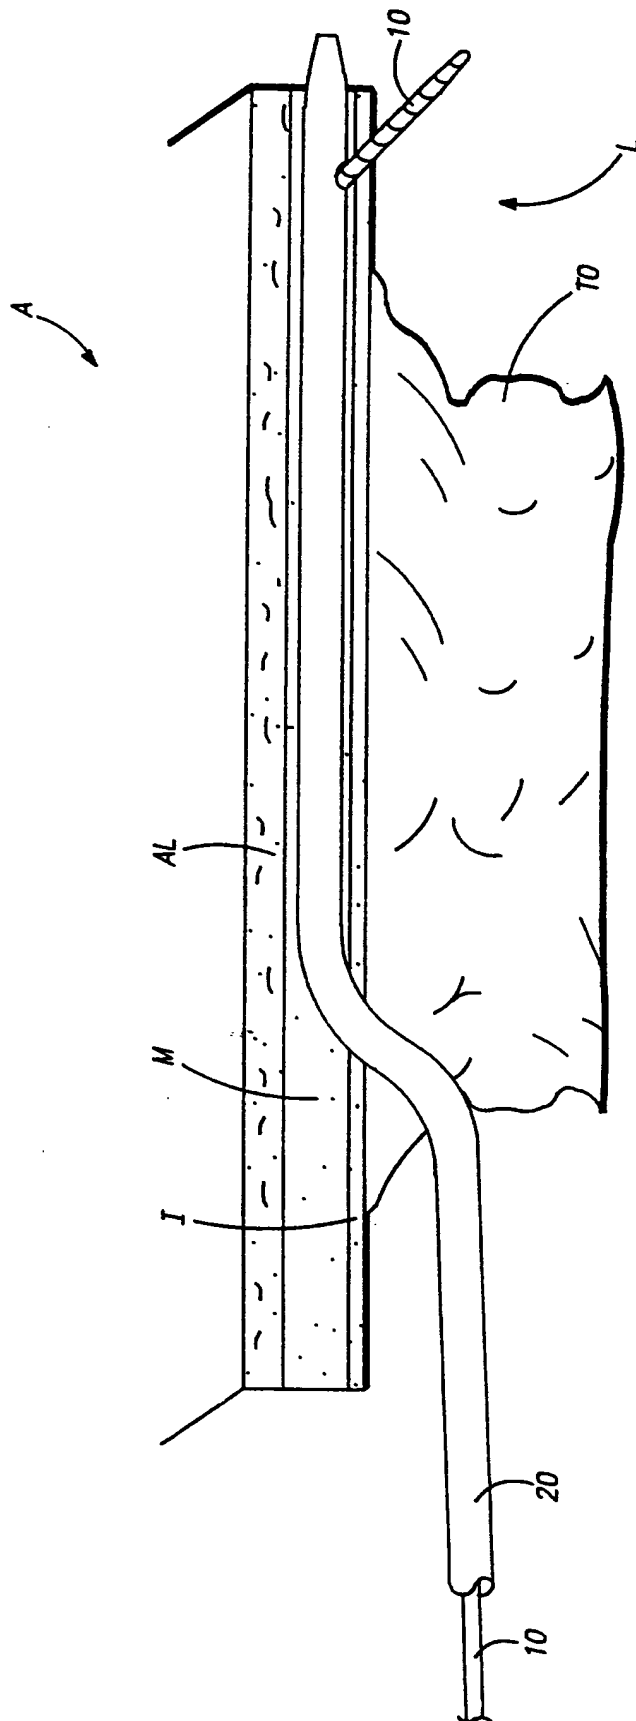


FIG. -3D

7/11

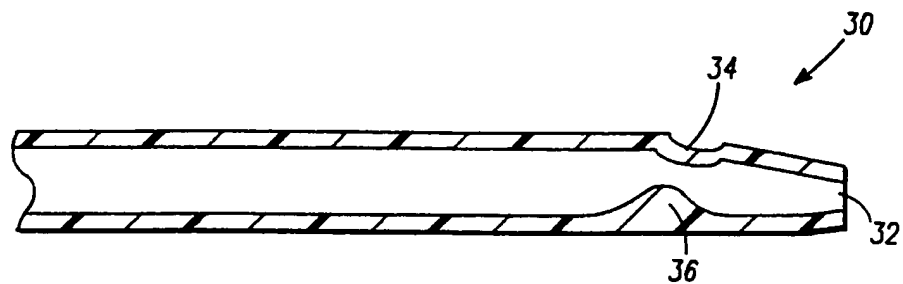


FIG. -4

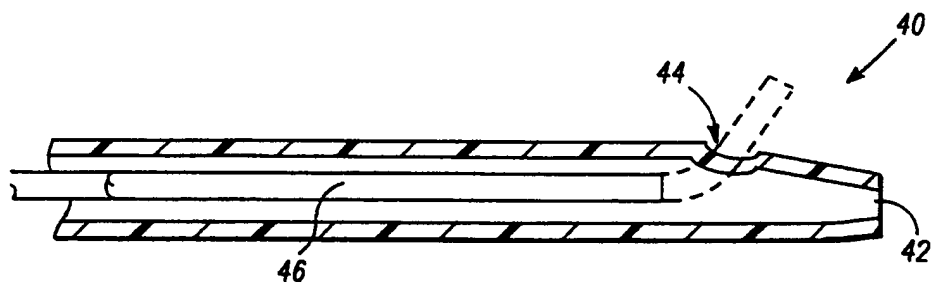


FIG. -5


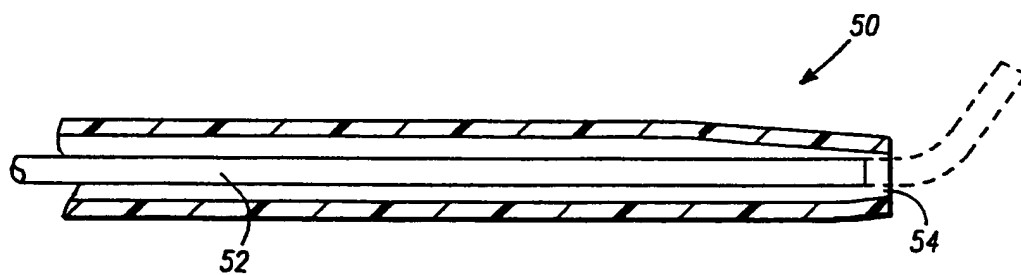


FIG. -6

8/11

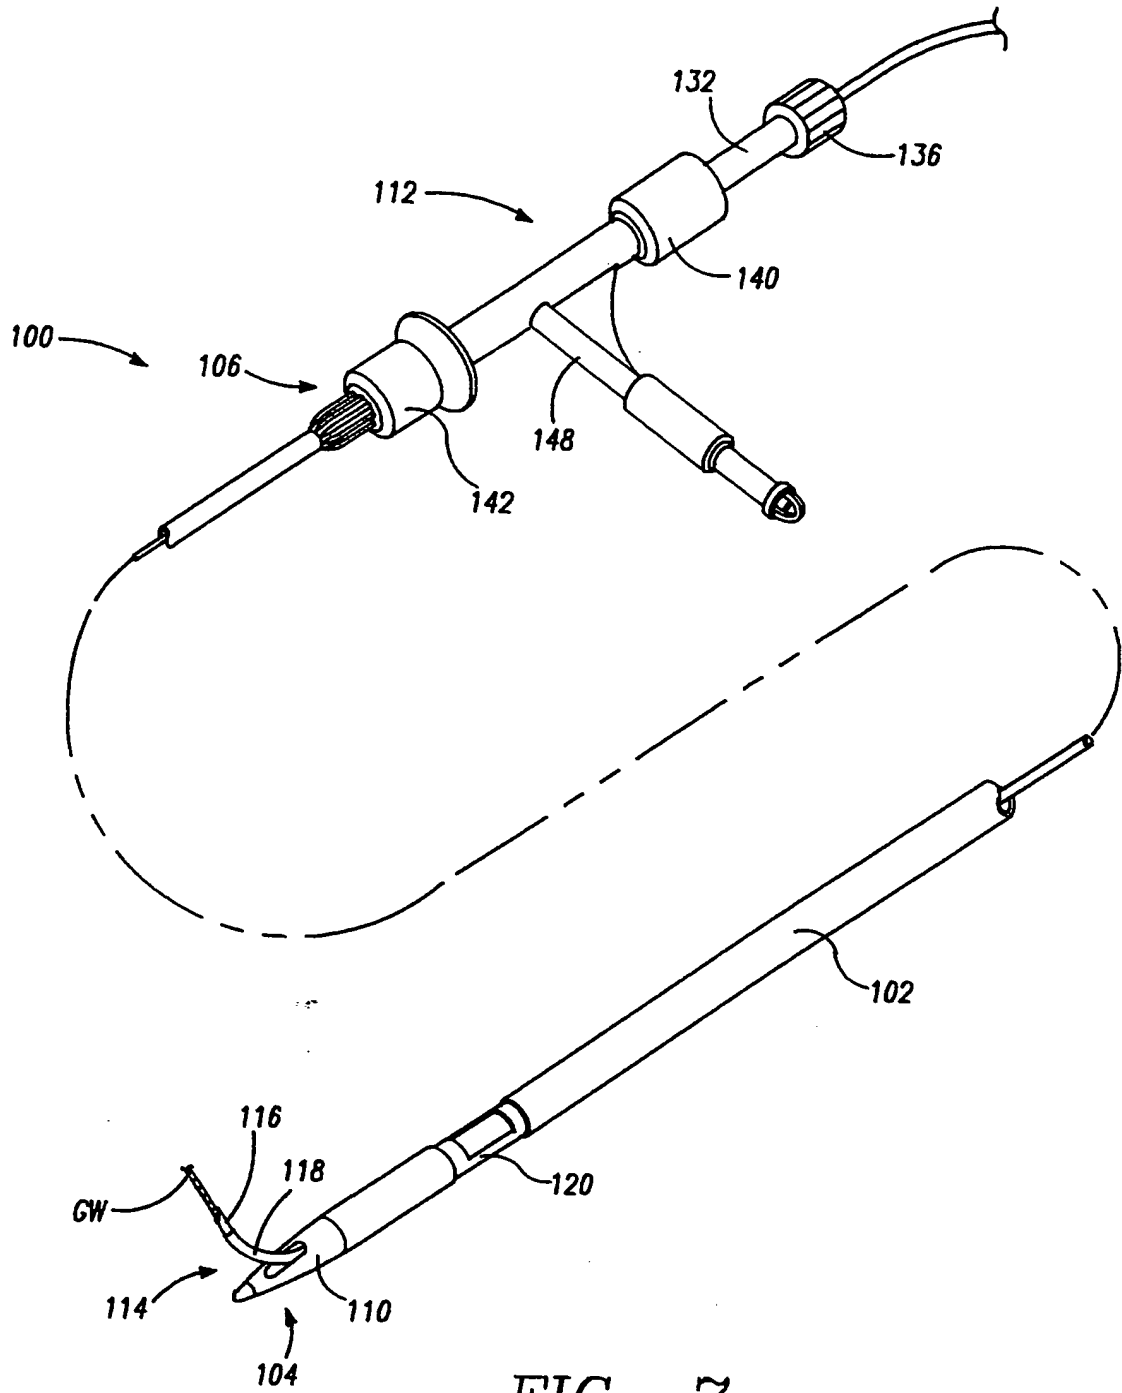

9/11

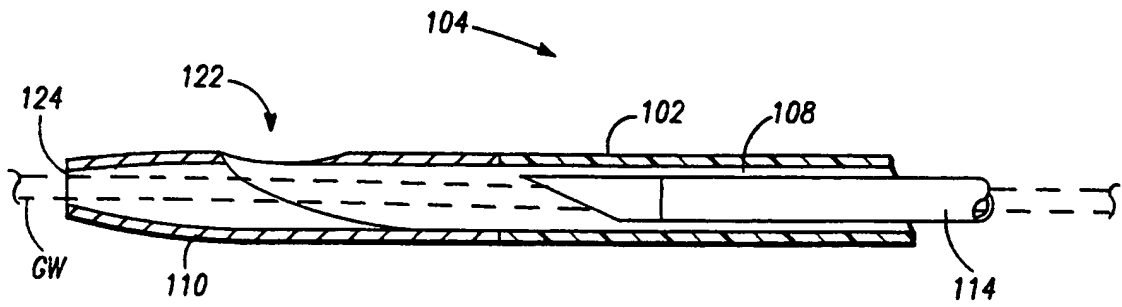


FIG. -8

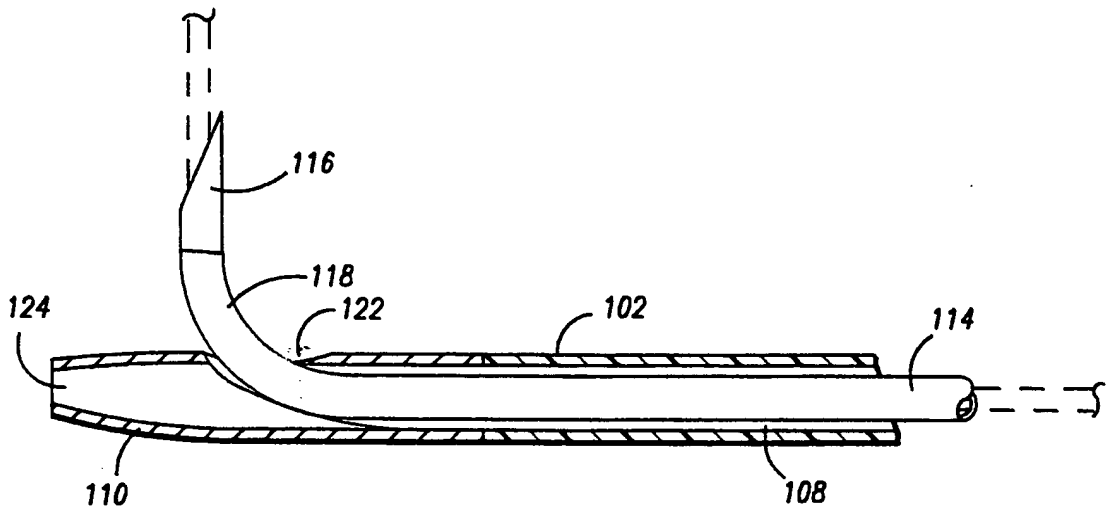


FIG. -9

10/11

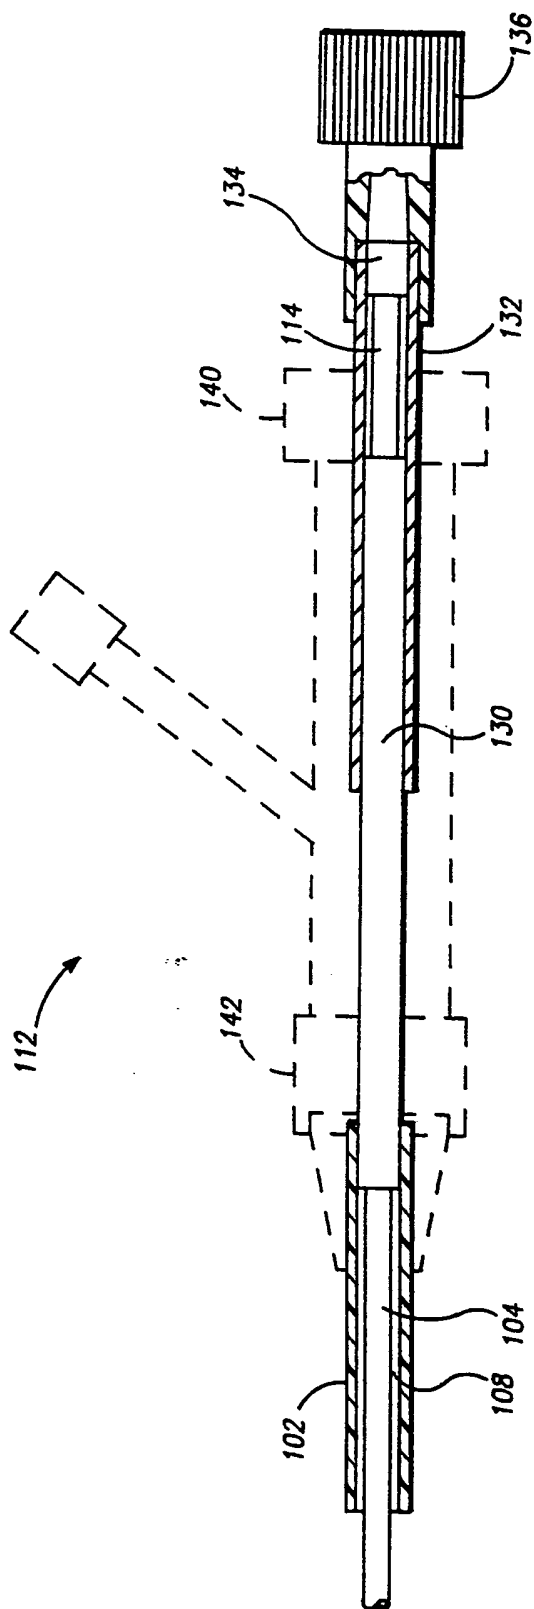


FIG. -10



11/11

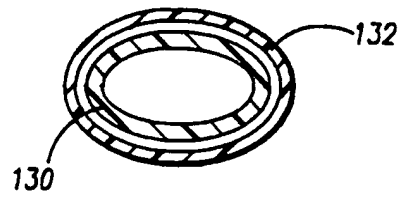


FIG. - 11A




FIG. - 11B




FIG. - 12

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 98/26938

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 A61B17/22

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 13463 A (TRANSVASCULAR) 17 April 1997 cited in the application see page 30, line 37 - page 31, line 35; figure 2A see page 41, line 3 - line 32; figure 4A see page 46, line 3 - line 29 see page 49, line 3 - page 50, line 21; figures 5A-E see page 57, line 18 - page 59, line 27; figures 6A,B,I,13A-E	24-39
X	US 5 429 144 A (WILK) 4 July 1995 cited in the application see column 6, line 67 - column 7, line 7; figures 5A,B	24-26

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

6 April 1999

Date of mailing of the international search report

16/04/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Moers, R

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/26938

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 628 761 A (RIZIK) 13 May 1997 see abstract; figure 1 ----	29
A	US 5 695 457 A (ST GOAR FREDERICK G ET AL) 9 December 1997 see column 14, line 27 - line 33 ----	24
A	WO 97 37581 A (BERTOLERO RAYMOND S ;ENDOSCOPIC TECHNOLOGIES INC (US); BERTOLERO A) 16 October 1997 see page 20, line 3 - line 5 ----	24
A	US 5 095 911 A (POMERANZ MARK L) 17 March 1992 cited in the application see abstract; figure 1 -----	30

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 98/ 26938

## Box I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 1-23  
because they relate to subject matter not required to be searched by this Authority, namely:  
Rule 39.1(iv) PCT- Method for treatment of the human or animal body by surgery
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of Item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

### Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

# INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 98/26938

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9713463 A	17-04-1997	AU 7431696 A	30-04-1997
		AU 7595396 A	30-04-1997
		CA 2234361 A	17-04-1997
		CA 2234389 A	17-04-1997
		WO 9713471 A	17-04-1997
		AU 1847197 A	22-08-1997
		AU 1847297 A	22-08-1997
		AU 1847397 A	22-08-1997
		CA 2244066 A	07-08-1997
		CA 2244079 A	07-08-1997
		CA 2244080 A	07-08-1997
		EP 0879068 A	25-11-1998
		WO 9727897 A	07-08-1997
		WO 9727893 A	07-08-1997
		WO 9727898 A	07-08-1997
US 5429144 A	04-07-1995	US 5409019 A	25-04-1995
		US 5287861 A	22-02-1995
US 5628761 A	13-05-1997	WO 9601590 A	25-01-1996
US 5695457 A	09-12-1997	US 5584803 A	17-12-1996
		AU 696812 B	17-09-1998
		AU 4284796 A	26-06-1996
		CA 2206091 A	13-06-1996
		EP 0841963 A	20-05-1998
		JP 10510178 T	06-10-1998
		WO 9617644 A	13-06-1996
		US 5807318 A	15-09-1998
		US 5558644 A	24-09-1996
		US 5702368 A	30-12-1997
		US 5766151 A	16-06-1998
		US 5792094 A	11-08-1998
		US 5795325 A	18-08-1998
		US 5769812 A	23-06-1998
		US 5738652 A	14-04-1998
		US 5814016 A	29-09-1998
		US 5868702 A	09-02-1999
WO 9737581 A	16-10-1997	AU 2451197 A	29-10-1997
		AU 2462597 A	29-10-1997
		AU 2665297 A	29-10-1997
		AU 2666097 A	29-10-1997
		EP 0892652 A	27-01-1999
		WO 9737596 A	16-10-1997
		WO 9737597 A	16-10-1997
		WO 9737716 A	16-10-1997
US 5095911 A	17-03-1992	DE 69126890 D	21-08-1997
		DE 69126890 T	19-02-1998
		EP 0591175 A	13-04-1994
		WO 9117710 A	28-11-1991
		US 5558093 A	24-09-1996
		US 5682897 A	04-11-1997

**THIS PAGE BLANK (USPTO)**